


## CO-A4 Carbon Monoxide Sensor Four Electrodes



PATENTED

Figure 1 Schematic Diagram of CO-A4

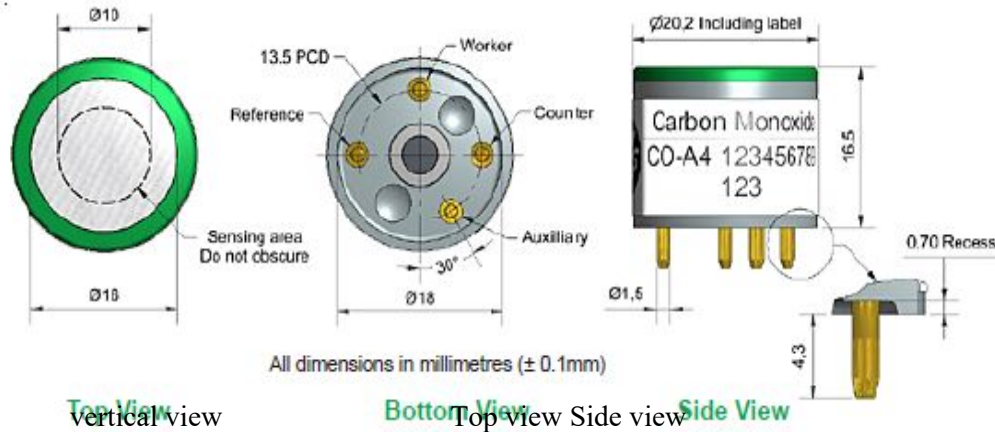

function	sensitivity	Sensitivity in 2ppmCO (nA/ppm)	220~410
	reaction time	Time from zero to 10ppmCO (s)	< 30
	zero current	Output at 20°Cm in zero-level air (nA)	-100~+10
	noise *	Standard deviation $\pm 2$ (equivalent ppb)	20
	range	CO measurement limit (ppm) that guarantees product performance	500
	degree of linearity	The ppm value of the full scale error is linear from 0 to 15ppm	< $\pm 1$
	overload	Maximum ppm value of gas pulse stabilized reaction	2000
	<b>* The test uses Alphasense AFE low noise circuit board</b>		
life span	zero drift	Equivalent ppb values that change in the laboratory air from year to year	< $\pm 100$
	sensitivity drift	Percentage change in laboratory air over the year, measured monthly	< 10
	working life	Number of months to which the output is reduced to 50% of the original signal (24 months guaranteed)	> 36
envir- onment	-20°C sensitivity	5ppm CO when, (output at -20°C/ output at 20°C)%	50~85
	Sensitivity at 50°C	At 5ppm CO, (output at 50°C/20°C)%	110~125
	-20°C when zero point	Change in nA with reference to 0°C 20	10~40
	50°C at zero point	Change in nA with reference to 0°C 20	-120~-200
cross sen- sitivity	filter capacity	ppm· hour H <sub>2</sub> S	250,000
	H <sub>2</sub> S	Gas sensitivity percentage measured at 5ppmH <sub>2</sub> S	< 0.1
	NO <sub>2</sub>	Gas sensitivity percentage <sub>2</sub> at 5ppmNO	< -2
	Cl <sub>2</sub>	Gas sensitivity percentage measured <sub>2</sub> at 5ppmCl	< 0.1
	NO	Gas sensitivity percentage measured at 5ppmNO	< -2
	SO <sub>2</sub>	Gas sensitivity percentage <sub>2</sub> at 5ppmSO	< 0.1
	H <sub>2</sub>	Gas sensitivity percentage measured at 100ppmH <sub>2</sub> (20°C)	< 50
	C <sub>2</sub> H <sub>4</sub>	Sensitivity percentage of gas measured at 100ppmC <sub>2</sub> H <sub>4</sub>	< 0.5
	NH <sub>3</sub>	Percentage sensitivity of gas <sub>3</sub> at 20ppmNH	< 0.1
key param- eter	temperature range	°C	-30~50
	pressure limit	kPa	80~120
	Humidity range	Percentage of continuous relative humidity	15~90
	Storage period	Number of months for preservation from 3 to 20°C (to be kept in a sealed tank)	6
	load resistance	$\Omega$ (Recommended use of AFE circuit board)	33~100
	weight	g	< 6

Figure 2 Sensitivity Temperature Characteristics

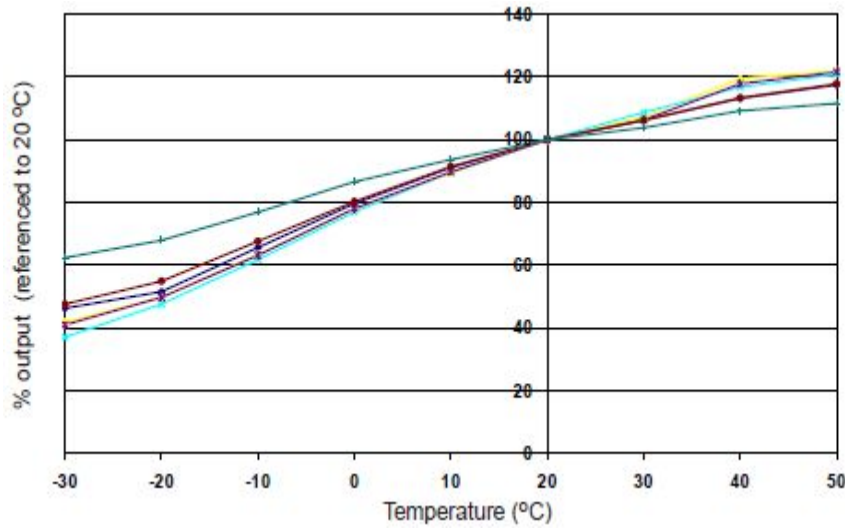


Figure 2 shows the temperature characteristics of sensitivity at 2ppm CO.

Data was collected from typical batch sensors.

Figure 3 Zero Temperature Characteristics

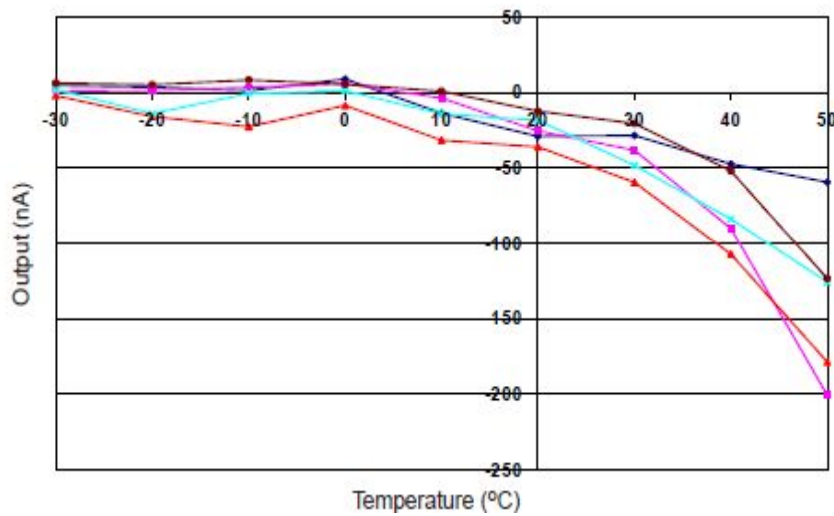


FIG. 3 shows the zero point output variation of the working electrode caused by temperature change, in units of nA.

Data was collected from typical batch sensors.

For more information about zero current correction, please contact Alphasense.

Figure 4. Linearity from 0 to 1ppm

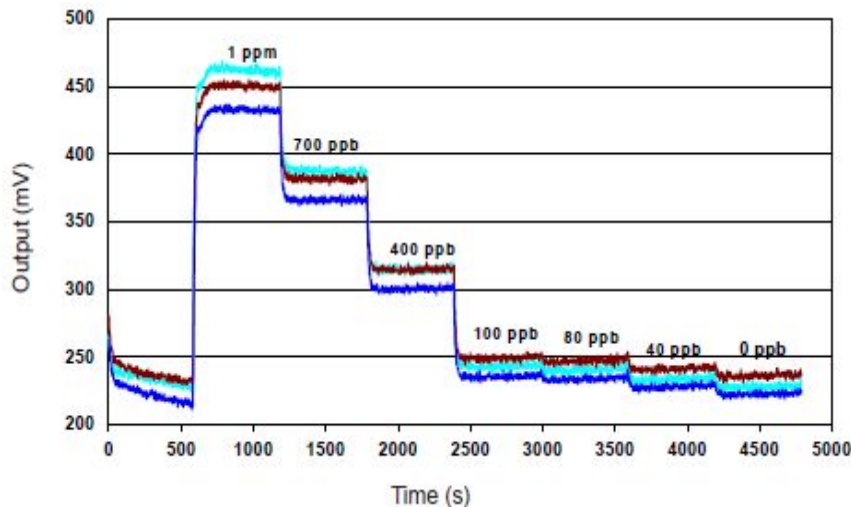


Figure 4 shows the reaction of the sensor in 0~1ppm CO.

Using the Alphasense AFE circuit board can reduce noise to 20ppb, and digital filtering can further reduce noise.

**深圳市杰晟兴电子有限公司 JM Components Limited**

地址: 深圳市福田区中航路7号鼎诚国际大厦南座2007室  
 手机: 13662266995 马少良 电话: 0755-83951311  
 官网: cn-sensor.com

邮编: 518031  
 传真: 0755-83952401  
 电邮: jackson@jmcomponents.com