

HDK dew sensor is a high response dew sensor to protect equipment from dew.


Features

- Small, light
- High response and reliable dew detection
- High reliability


Applications

- VTR
- Camera
- Copier

Dimensions

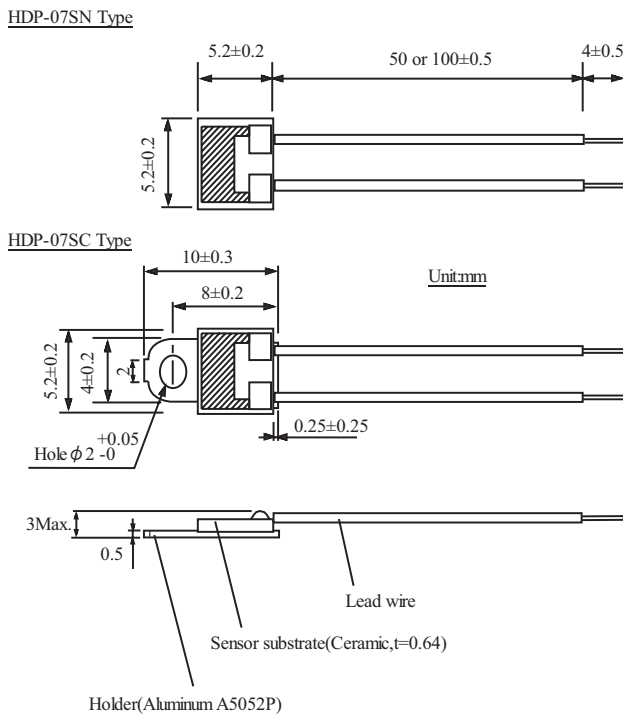

Typical Characteristics

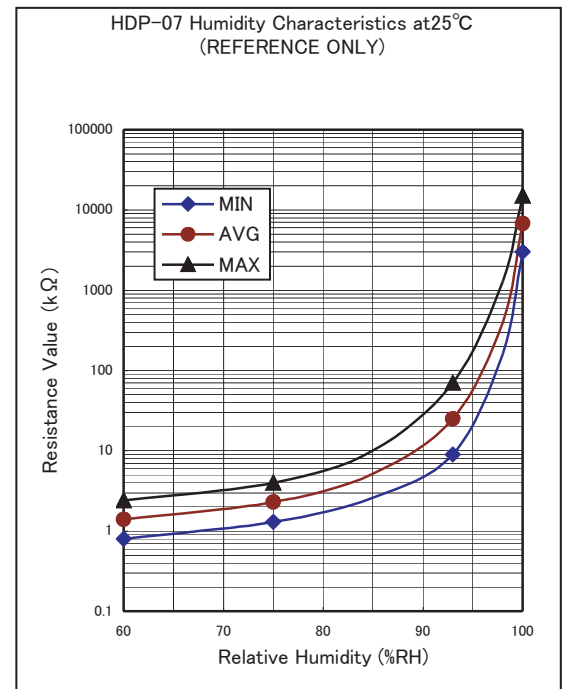

Specifications

Item	HDP-07SN1	HDP-07SN2	HDP-07SC1	HDP-07SC2	Unit
Element Size	5.2×5.2				mm
Lead Length	50	100	50	100	mm
Mounting Plate (Holder)	None		Yes		-
Working Voltage	AC,DC 0.8V Max. (2mW)				V
Working Temperature Range	+1~+60				°C
Working Humidity Range	0~100				%RH
Response	200kΩ Min. within 10 sec.				-
Resistance(25°C)	75%RH:20kΩ Max., 93%RH:100kΩ Max., 100%RH:200kΩ Min.				Ω

深圳市杰晟兴电子有限公司 JM Components Limited

地址: 深圳市福田区中航路7号鼎诚国际大厦南座2007室

手机: 13662266995 马少良 电话: 0755-83951311

官网: cn-sensor.com

邮编: 518031

传真: 0755-83952401

电邮: jackson@jmcomponents.com