

## Model 31 Mid-Range Precision Miniature Load Cell

Order Code AL311


- 1000 g to 1,000 lb.
- mV/V Output
- Stainless Steel
- Miniature Design



### Wiring Code

#### Cable/ Unamplified

- Red (+) Excitation
- Black (-) Excitation
- Green (-) Output
- White (+) Output

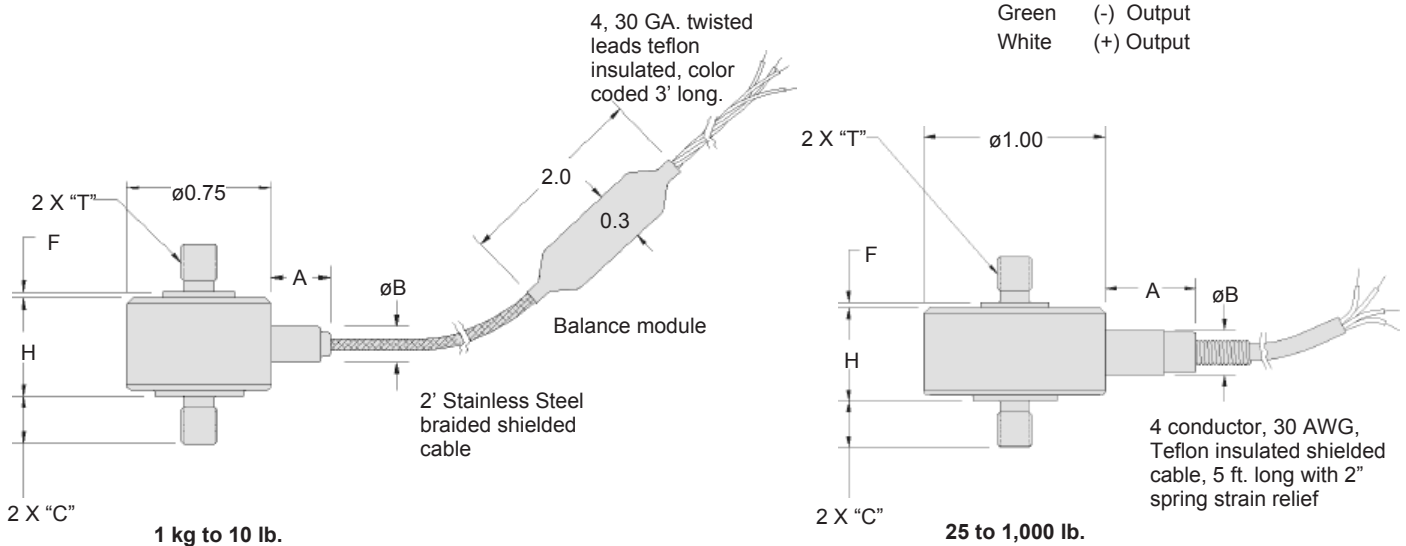

### Dimensions

Ranges (lb.)	T	H (in.)	C (in.)	F (in.)	A (in.)	B (in.)
1000 g; 5; 10 lb.	#6-32 UNC	0.45	0.25	0.05	0.31	0.19
25; 50; 100 lb.	#10-32 UNF	0.52	0.25	0.03	0.50	0.25
250; 500; 1000 lb.	1/4-28 UNF	0.52	0.38	0.03	0.50	0.25

### Performance

- Load Ranges.....1000 g; 5; 10; 25; 50; 100; 250; 500; 1000 lb.
- Linearity
  - 1000 g to 250 lb.....+/- 0.15% Full Scale
  - 500 to 1,000 lb.....+/- 0.2% Full Scale
- Hysteresis
  - 1000 g to 250 lb.....+/- 0.15% Full Scale
  - 500 to 1,000 lb.....+/- 0.2% Full Scale
- Non-Repeatability
  - 1000 g.....+/- 0.1% Full Scale
  - 5 to 1,000 lb.....+/- 0.05% Full Scale
- Tolerance on Output
  - 1000 g.....1.5 mV/V (nominal)
  - 5 to 1,000 lb.....2 mV/V
- Operation.....Tension/ Compression (note 3)
- Resolution.....Infinite

# Model 31 Std

## Environmental

Temperature, Operating.....-65° to 250° F  
 Temperature, Compensated.....60° to 160° F  
 Storage Temperature.....-100° to 300° F  
 Temperature, Effect  
     Zero.....0.005% Full Scale/° F  
     Span.....0.005% Full Scale/° F

## Electrical

Strain Gage Type.....Bonded Foil  
 Excitation (calibration)  
     1 kg to 10 lb.....5 VDC  
     25 to 1000 lb.....10VDC  
 Insulation Resistance.....5000 Megohms @ 50 VDC  
 Bridge Resistance.....350 Ohms  
 Zero Balance.....1% max.  
 Electrical Termination (std).....Teflon Cable (5 ft.)


## Mechanical

Maximum Allowable Load.....150% F.S. (note 1)  
 Weight.....See table  
 Material.....17-4 PH Stainless Steel  
 Deflection Full Scale.....See table  
 Natural Frequency.....See table

## Deflections and Ringing Frequencies

Capacity (lb.)	Deflection at Full Scale (in.)	Ringling Frequency (Hz)	Weight (grams)
1000 g to 10 lb.	0.001	3,000	21
25 to 100	0.001	10,000	63
250 to 1000	0.0015	12,000	80

## Typical System Diagram

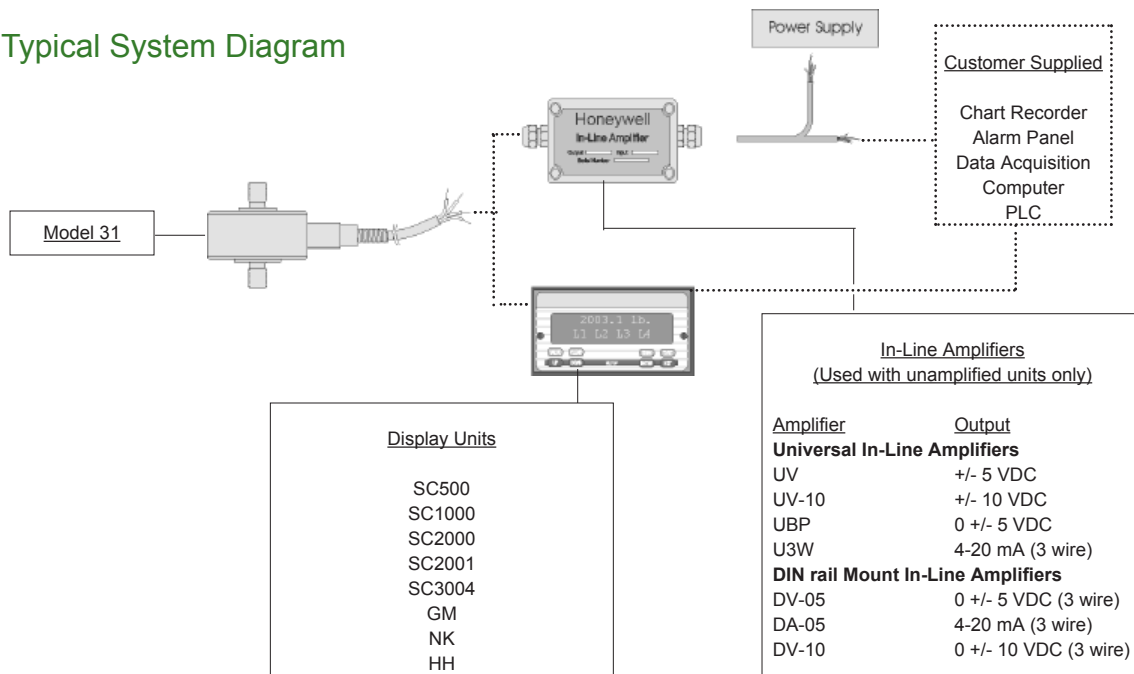

## Range Codes

Range	Range Code
1000 g.	AR
5 lb.	AT
10 lb.	AV
25 lb.	BL
50 lb.	BN
100 lb.	BR
250 lb.	CN
500 lb.	CR
1000 lb.	CV

## Model 31 Std

### Options

	Same Day Ship	Fast track manufacture	Build to Order
Load Range	1000 grams 5, 10, 25, 50, 100, 250, 500, 1000 lbs		
Temperature Compensation	1a. 60° to 160° F	1b. 30° to 130° F 1c. 0° to 185° F 1d. -20° to 130° F 1e. -20° to 200° F 1j. 0° to 50° C 1k. -20° to 85° C 1m. -25° to 110° C	1f. 70° to 250° F 1g. 70° to 325° F 1h. 70° to 400° F 1i. -65° to 250° F
Internal Amplifiers	2u. Unamplified, mV/V output		
Electrical Termination	6e. Integral cable: Teflon	6v. Phoenix connector on end of cable	6a. Bendix PTIH-10-6P - 6 pin (max. 250° F) (note 5) 6d. Microtec DR-4S-4H 4 pin 6f. Integral cable: PVC 6g. Integral cable: Neoprene (max. 180° F) 6h. Integral cable: Silicone 6i. Integral underwater cable (max. 180° F) 15d. Connector on end of cable
Special Calibration		9a. 10 point (5 up/5 down) 20% increments @ 20° C 9b. 20 point (10 up/10 down) 10% increments @ 20° C	
Special Calibration		30a. Compression only calibration, Positive in compression 30b. Tension and Compression calibration, Positive in tension 30c. Compression only calibration, Negative in compression	
Shock & Vibration		44a. Shock and vibration resistance	
Interfaces (note 4)		53e. Signature Calibration 53t. T.E.D.S. IEEE 1451.4 Module	

Supplied as standard

### Notes

- Allowable Maximum Loads- Maximum load to be applied without damage (note 2).
- Without Damage- loading to this level will not cause excessive zero shift or performance degradation. The user must consider fatigue life for long term use and structural integrity. All structurally critical applications (overhead loading, etc.) should always be designed with safety redundant load paths.
- Standard calibration for tension/ compression load cells is in tension only.
- TEDS available with integral cable units only.
- Availability varies with range.

### Special Customer Requirements (Consult Factory)

OEM Labels  
Radiation proof  
Different cable lengths

## 深圳市杰晟兴电子有限公司 JM Components Limited

地址：深圳市福田区中航路7号鼎诚国际大厦南座2007室

手机：13662266995 马少良 电话：0755-83951311

官网：cn-sensor.com

邮编：518031

传真：0755-83952401

电邮：jackson@jmcomponents.com