

## UV Radiometer 2.0

### GUVx-T1xGS2-3LW5.0

#### Description

Water Enviroments(10Bar), Display : Absolute Power, Output of Display : Relay, 4-20mA (Option), RS485 (Option)

#### Constitution

Display, Sensor Probe, 5m Cable

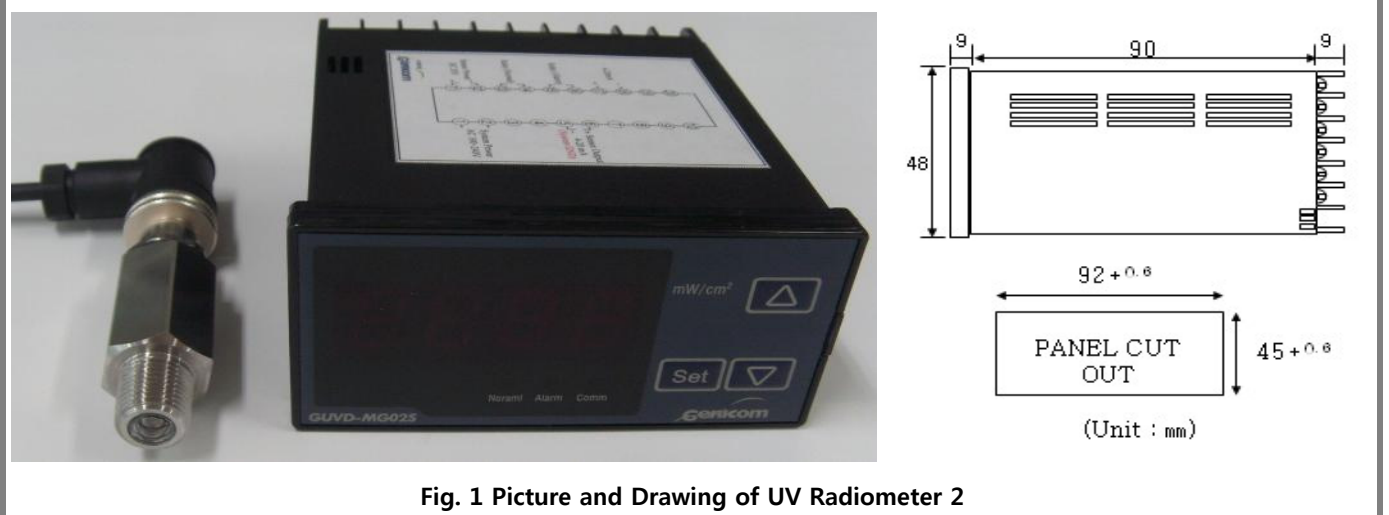


Fig. 1 Picture and Drawing of UV Radiometer 2

#### Case dimensions

Thread/Length for Mounting	Diameter (mm)	Window (mm)	Wrench Size (mm)	Length (mm)	Weight (g)	Case Material
PT1/4 "/12 mm	21	7	19	63	67	STS 316-L

#### Absolute Maximum Ratings

Parameter	Value			Unit	Remark
	Min.	Typ.	Max.		
Operating Temperature	-30		85	°C	Sensor Probe
	0		50	°C	Display
Power Consumption			5	VA	

#### Electro-Optical Characteristics (at 25 °C)

Parameter	Value	Value			Unit	Remark
		Min.	Typ.	Max.		
Detection Wavelength Range	GUVV-T11GS2-3LW5.0	230		395	nm	
	GUVB-T12GS2-3LW5.0	220		320	nm	
	GUVC-T11GS2-3LW5.0	220		280	nm	
Detection Power Range		0		100	mW/cm <sup>2</sup>	

\* Maximum of detection power : 20 mW/cm<sup>2</sup> (Option), 100 mW/cm<sup>2</sup> (Standard), 1000 mW/cm<sup>2</sup> (Option)

#### Connection (Backside of Display)

- |  |                                    |
|--|------------------------------------|
| 1. Main Power : 1 & 2, AC 100 ~ 240 V 50/60 Hz               | 4. 4-20 mA (Option) : 17(+), 18(-) |
| 2. Sensor Probe : 11(Vcc), 12(GND), 6(Sensor output), 5(GND) | 5. RS485 (Option) : 19(A), 20(B)   |
| 3. Relay : 13 & 14 (Normal), 15 & 16 (Alarm)                 |                                    |

## 深圳市杰晟兴电子有限公司 JM Components Limited

地址: 深圳市福田区中航路7号鼎诚国际大厦南座2007室

手机: 13662266995 马少良 电话: 0755-83951311

官网: cn-sensor.com

邮编: 518031

传真: 0755-83952401

电邮: jackson@jmcomponents.com